

Iten™

Variable vertical masking panels and Tela™ 80 material allow for full enjoyment when viewing and listening to movies in super widescreen formats.



-  home cinema
-  education
-  digital signage
-  corporate
-  worship
-  simulation and visualization
-  broadcast
-  rental and staging
-  command and control

Key Benefits:

- 1** Constant image height with variable vertical masking to mask from 2.40:1 to 1.33:1 and anything in between
- 2** Electronically controlled side masking panels interoperable with almost any home automation system
- 3** Available with Tela 80 material for enhanced acoustical transparency



Iten

The Iten™ is a constant height, variable masking screen featuring a native 2.40:1 image area that delivers a more immersive experience when viewing super widescreen format content. Iten's vertical masking panels simultaneously glide in from the left and right sides to properly mask 2.40:1, 1.85:1, 1.78:1, and 1.33:1 aspect ratios.

The Iten variable masking system is optimized for acoustical transparency that is ideal for audiophiles and other discerning clientele. It comes with Tela 80, Stewart's woven acoustically transparent fabric that is engineered for both visual fidelity and acoustical integrity and features acoustically transparent masking panels as part of the standard offering.

Stewart's exclusive VeLux™ black velvet appliqué gives Iten's fixed frame configuration a sophisticated look and feel. This specialized frame finish, unique to Stewart Filmscreen, absorbs possible over-scan while boosting perceived contrast and enhancing the system's visual appeal. The standard black backing on the Tela 80 material is opaque, stopping any light reflection that stems from behind the Iten screen system.

SPECIFICATIONS

Aluminum extrusion framing system	Included
Electronically controlled vertical masking panels	Included
Specialized lace and grommet	Included
VeLux™ appliqué border	Included
Acoustically transparent masking panels	Included

MATERIAL

Front projection material - Tela 80	Included
-------------------------------------	----------

MOUNTING

Wall	Included
Aperture	Optional

MASKING MOTOR

120 Volt	Included
220 Volt	Optional


MASKING CONTROL

ILT interface	Included
---------------	----------


FRAME OUTER DIMENSIONS

Frame height	Image Height + 14" (356 mm)
Frame width	Image Width + 18" (458 mm)


For custom sizes, please consult your local Stewart representative. Find your local representative at www.stewartfilmscreen.com

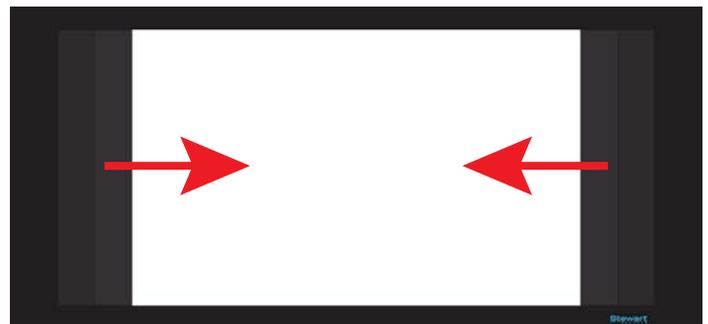


Vertical panels glide inward from both left and right side to mask image.

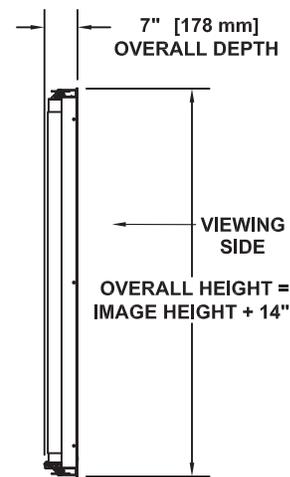

SIDE VIEW



TOP VIEW

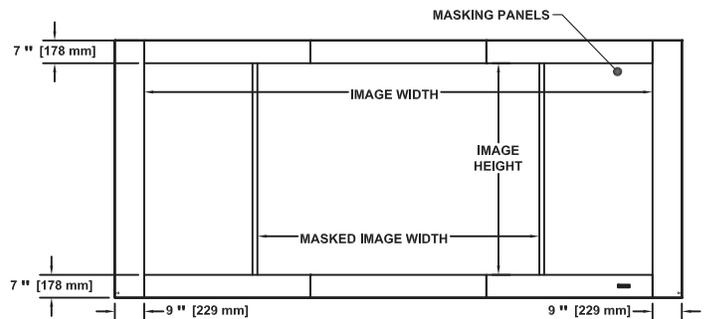

FRONT VIEW